

Received January 11, 2021, accepted February 4, 2021, date of publication February 9, 2021, date of current version February 18, 2021.

Digital Object Identifier 10.1109/ACCESS.2021.3058092

Single Longitudinal Mode Lasers by Using Artificially Controlled Backscattering Erbium Doped Fibers

ROSA ANA PEREZ-HERRERA¹, **PABLO ROLDÁN-VARONA**^{2,3,4}, **LUIS RODRIGUEZ COBO**³,
JOSE MIGUEL LÓPEZ-HIGUERA^{2,3,4}, (Senior Member, IEEE),
AND MANUEL LOPEZ-AMO¹, (Senior Member, IEEE)

¹Department of Electrical Electronic and Communication Engineering and Institute of Smart Cities (ISC), Public University of Navarra, 31006 Pamplona, Spain

²Photonics Engineering Group, University of Cantabria, 39005 Santander, Spain

³CIBER-BBN, Instituto de Salud Carlos III, 28029 Madrid, Spain

⁴Instituto de Investigación Sanitaria Valdecilla (IDIVAL), 39005 Santander, Spain

Corresponding author: Rosa Ana Perez-Herrera (rosa.perez@unavarra.es)

This work was supported in part by the MINECO/AEI (Ministerio de Economía y Competitividad/Agencia Estatal de Investigación), Spain, under Grant TEC2016-76021-C2-1-R, Grant TEC2016-76021-C2-2-R, and Grant PID2019-107270RB; in part by the Ministerio de Educación, Cultura y Deporte of Spain under Grant FPU2018/02797, and in part by the Projects for Young Researchers UPNA 2019 (Universidad Publica de Navarra) and FEDER Funds (European Regional Development Fund).

ABSTRACT In this work, we propose and experimentally demonstrate a new distributed short linear cavity fiber laser. At one of the cavity ends, fabricated by a commercial femtosecond fiber laser chirped pulse amplifier, an artificially controlled backscattering erbium doped fiber section has been connected. This distributed reflector acts also as a saturable absorber, leading to the generation of tunable and switchable single longitudinal-mode laser emissions. The distributed reflector consists of 9 micro-drilled sections of about 1cm each one and randomly spread throughout 2 meters of highly doped erbium fiber. The total length of the fiber laser is 9.5 m and the laser shows a single mode behavior at all the emitted wavelengths. Using this new kind of reflecting saturable absorber, single and multiple single-mode emissions can be obtained. The achieved laser presents a pump threshold as low as 45 mW and shows up to 8 different single-mode emission lines with an optical signal to noise ratio of 45dB.

INDEX TERMS Distributed amplifier, erbium-doped fiber amplifier, fiber laser, laser cavity resonator.

I. INTRODUCTION

Stable erbium-doped fiber (EDF) lasers are attractive sources that have many applications, such as optical sensing, microwave photonics, optical testing, and optical communications [1]. EDF lasers would present unstable multimode oscillation that comes from homogeneous broadening effects, long fiber cavities or spatial hole-burning among others. Some of the techniques that have been used to guarantee a single-longitudinal-mode (SLM) operation in EDF lasers are related with the Rayleigh backscattering feedback [2] or the use of saturable absorbers (SA) to suppress multiple modes in the cavity [3].

Since the advent of random distributed feedback fiber lasers, optical fiber distributed reflectors have been used as

a new kind of laser mirrors. These mirrors use Rayleigh backscattering, improves output power stability and generates modeless behavior [4]. Due to the low Rayleigh backscattering coefficient of the single mode fiber (SMF), high pump power levels for Raman amplification were initially needed for the operation of all random fiber lasers by using Raman gain. Recently [5], artificially controlled backscattering (ACB) techniques that do not require Raman amplification or technical conditions and processes as complex as those required to fabricate, for example, random fiber gratings (RFG) [5] have been demonstrated. However, they can generate a distributed mirror using the random feedback from Rayleigh scattering [6]. In addition to this, by using a rare-earth doped fiber to fabricate this reflector, the power of the pump source can drop to the level of few milliwatts [7]. Thus, EDF-based amplification can be used to fabricate random lasers.

The associate editor coordinating the review of this manuscript and approving it for publication was Muguang Wang¹.

This random feedback from Rayleigh scattering can be improved by drilling the fiber using a femtosecond laser with ultrashort pulses width and very strong instantaneous power. It induces a nonlinear multi-photon absorption of material to modulate the refractive index along an optical fiber, so the position and reflectivity of the scattering points can be controlled [8].

An approach of introducing strong backscattering as well as decreasing the pump power threshold and shorten the cavity length of fiber lasers is shown in this work. Another remarkable advantage of this distributed reflector is that can be also used as a saturable absorber, leading to the generation of tunable and switchable single longitudinal-mode laser emissions.

In this paper, we combine both concepts to achieve a new cavity for stable multiwavelength single-mode lasers.

So here it is reported, to the best of our knowledge, the first experimental demonstration of a short cavity fiber laser assisted by an ACB-EDF which acts both as a saturable absorber and as a compact distributed reflector. The experimental fiber laser properties in terms of multiwavelength emission, single-longitudinal mode behavior and obtained output power levels are here presented.

Single and multiple single-mode laser emissions have been achieved using this new kind of reflecting saturable absorber; with average measured optical signal to noise ratios (OSNRs) of 45 dB.

II. EXPERIMENTAL SETUP

In order to fabricate the artificially controlled backscattering erbium doped fiber (ACB-EDF), a commercial femtosecond fiber laser chirped pulse amplifier (FLCPA) was employed [9]. The operating wavelength is 1030nm, with a 370fs pulse duration.

All the inscriptions were made using a pulse energy of $4.5\mu\text{J}$ and a pulse repetition rate (PRR) of 100Hz. The laser beam was tightly focused with an objective lens from Mitutoyo ($\text{NA}=0.42$), and the EDF was placed on a high-precision air-bearing XYZ stage from Aerotech. The distributed reflector consists of 9 micro-drilled sections of $\sim 1\text{cm}$ each one and they were randomly spread throughout 2 meters of highly doped erbium fiber.

The inscriptions consist of several hundred of refractive index changes (RICs) whose spacing is pseudo-random between 2 and $20\mu\text{m}$, as depicted in Fig. 1. In order for each RIC to be induced in the entire core cross-section, the slit beam shaping technique is used [10], with a slit width of $400\mu\text{m}$ (2.5mm beam diameter).

After being fabricated, this MD-EDF was characterized by using an optical backscatter reflectometer (OBR). The time-domain acquisition mode with a spatial resolution of $10\mu\text{m}$ was employed to evaluate the backscattered light [11] through this 2-meter-long piece of MD-EDF.

Because of that ultra-high spatial resolution, the employed OBR (LUNA OBR 4600) can be used for internal component and fiber testing [11]. Figure 2 shows the backscattered

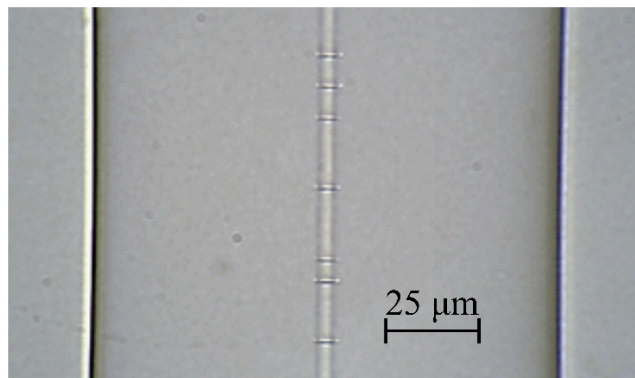


FIGURE 1. Microscope image of one of the nine quasi-randomly distributed reflectors inscribed along the erbium doped fiber.

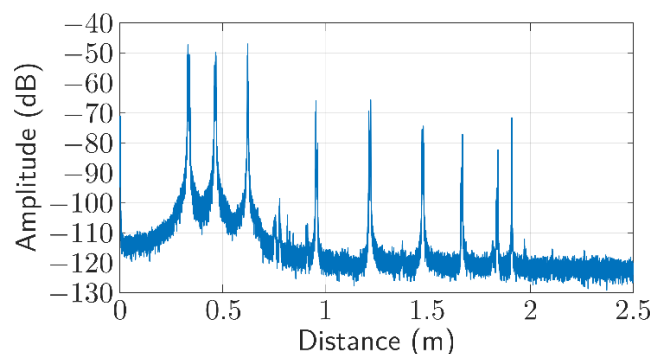


FIGURE 2. Backscattered optical power as a function of fiber length for a 2-meters-long micro-drilled erbium-doped fiber section.

optical power as a function of the total reflector fiber length when the MD-EDF is connected to the OBR. Here, nine intensity spikes spaced a random distance between them can be seen, corresponding to the nine micro-drilled reflecting sections-carried out into the 2 meters long highly doped erbium fiber section. The free termination of this MD-EDF was angle-cleaved to avoid end Fresnel reflection.

Different backscattered light amplitudes for each peak can also be observed at the location of the micro-drilled reflecting sections. Each one of these micro-drilled sections presents a pseudo-random reflected Rayleigh backscatter because of the refractive index fluctuations and their pseudo-random spacing between them. As the number of random reflectors increases, the random feedback is enhanced but together with larger loss in the total ACB-EDF section. Amplitudes from about 40 to around 50dB over the noise floor were recorded. Those high backscattered light amplitudes are due to the Rayleigh backscattering (RBS) that occurs when the fiber is micro-drilled.

Figure 3 shows a schematic diagram of the experimental linear short-cavity fiber laser setup, in which the ACB-EDF was used both as saturable absorber and as a distributed reflector. The pump laser was centered at 976nm so a 980/1550 nm wavelength division multiplexer (WDM) was used to inject this pump into the fiber laser cavity. Two pieces of EDFs, both M12 (980/125, from Fibercore Inc.) with a

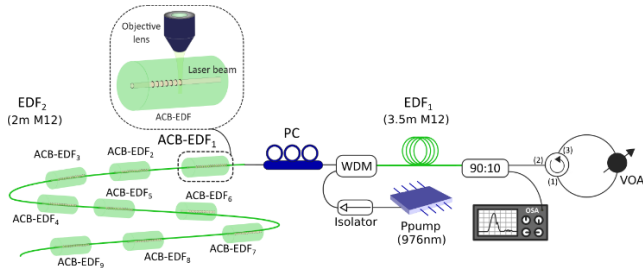


FIGURE 3. Schematic diagram of the experimental linear cavity fiber laser setup, in which the MD-EDF (EDF₂) was also used as saturable absorber.

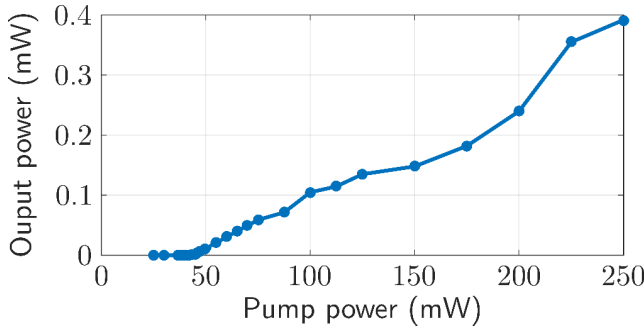


FIGURE 4. Output power versus pump power for the linear cavity fiber laser.

theoretical peak core absorption range from 16 to 20 dB/m at 1531 nm, were located into the setup. The first one (EDF₁), with 3.5 m long, was used as an active gain medium of the cavity and placed at the common port of the WDM. The second one (EDF₂), with about 2 m long and where the nine micro-perforated inscriptions were carried out, was located at one of the cavity ends, that is, after the polarization controller (PC) which was also connected to the 1550 nm WDM port. The PC provided an intracavity mechanism to compensate for the slight polarization dependent gain or adjust the polarization states of the feedback light-wave [12]. The free end of EDF₂ was immersed in refractive-index-matching gel to avoid undesired reflections. The other end of the linear laser cavity ends at a fiber loop mirror (FLM) including a 3-port optical circulator where a variable optical attenuator (VOA) is connected between ports 3 and 1. This recirculating signal travels to an optical coupler where 10% of the reflected signal is headed into an optical spectrum analyzer (OSA) with a resolution of 0.1nm. The remaining 90% passes through the 3.5 m long of EDF to the end of the linear short cavity fiber laser.

The following experimental measurements were developed at room temperature and in addition to this, no temperature compensation techniques or vibration isolation were employed.

Figure 4 illustrates the output power as a function of pump power for the linear cavity fiber laser. As this figure shows, the achieved laser presents a pump threshold of about 45 mW, and an efficiency of 0.15%.

Figure 5 (a) shows the optical spectrum, measured by an OSA, of the short-linear-cavity fiber laser with MD-EDF

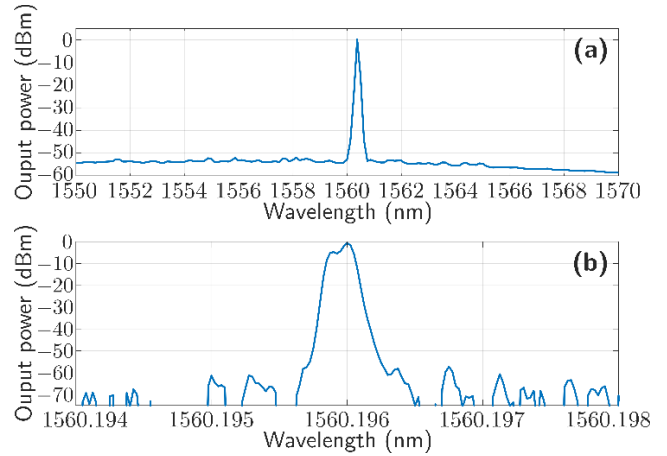


FIGURE 5. Output optical spectrum of the linear-cavity fiber laser with MD-EDF pumped by a 976nm laser at power of 100mW without using the optical variable attenuator, measured by the OSA (a) and the BOSA (b).

pumped by a 976 nm laser at power of 100 mW without using a VOA. In this case, the attenuator was disconnected from the optical circulator, and ports 3 and 1 were connected. When operating above this threshold, a single-wavelength laser centered at 1560.1 nm and a pump threshold as low as 45 mW were achieved as Fig. 4 illustrates.

The output power level obtained from this single-laser oscillation when pumped at 100 mW was around 0 dBm, as Fig. 5 (a) illustrates. An OSNR as high as 55 dB was measured by properly tuning the polarization controller (PC) in order to maximize this value. Several previous studies show that these values are reasonably good for most sensor applications [13].

After that, the behavior of the longitudinal modes of this linear cavity fiber laser was experimentally analyzed by using a high-resolution optical spectrum analyzer (BOSA-C Aragon Photonics) which offers simultaneously a high resolution (0.08 pm) and a high dynamic range (>80 dB). This spectral resolution has a lower value than the mode spacing between the longitudinal modes of the linear cavity laser so, as Fig. 5 (b) illustrates, single-longitudinal mode (SLM) operation condition of this laser can be verified, showing only one mode at the central wavelength emission. In addition to this, a laser linewidth at full width at half-maximum (FWHM) of 0.05 pm was measured. This value was limited by the BOSA's resolution and corresponds to a linewidth of the electric beat signal of around 6.2 MHz as presented in Figure 6.

To fully verify the number of lasing modes of the linear cavity fiber laser, a heterodyne detection was also performed by mixing the signal of a tunable laser source (TLS, Agilent 8164B) with the laser output by means of a 50:50 coupler. The FWHM linewidth of the TLS was 100 kHz and its wavelength has been placed close to the obtained laser. Figure 6 depicts the achieved result and confirms the measures attained with the BOSA-C and depicted in Fig. 5 (b). This measurement has been repeated at different emission wavelengths and, in all cases, a SLM operation was achieved

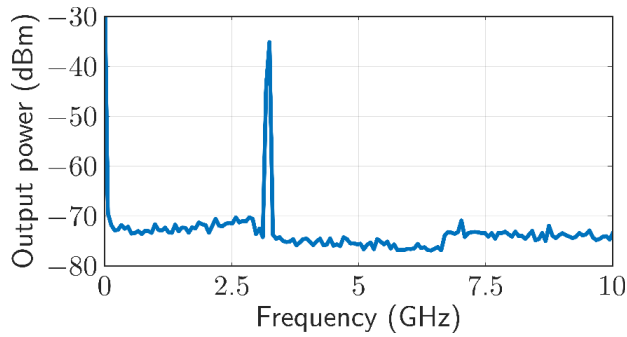


FIGURE 6. Electric beat with a tunable laser source (TLS) of the laser output showing the SLM operation condition.

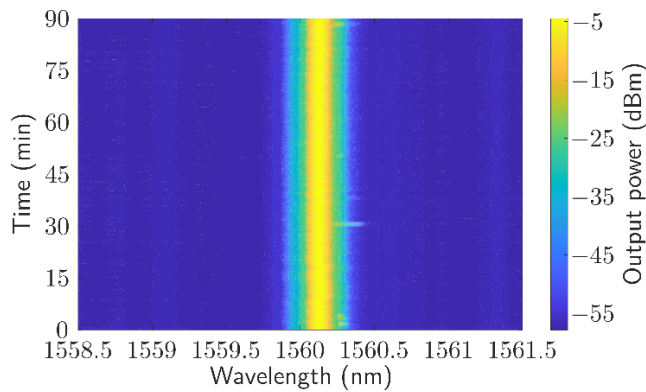


FIGURE 7. Output power fluctuations versus time, measured at room temperature generated for one lasing wavelength with SLM behavior.

even when several lasing wavelengths were oscillating simultaneously.

After verifying the SLM operation, the system output stability was experimentally analyzed. As it has been previously demonstrated, when a SLM behavior is achieved lower output power fluctuations are obtained [14]. Figure 7 shows the output power fluctuation of the lasing wavelength centered at 1560.1 nm for the SLM operation. The measured data were recorded during a period of 90 minutes each 15 seconds and a confidence level (CL) of 95% was considered. It was noticed that at room temperature, the maximum output power variation was around 0.66 dB.

Once the natural oscillation of this linear cavity fiber laser was experimentally studied, a variable optical attenuator was connected between the ports 1 and 3 of the optical circulator. By doing that, the reflectivity at one end of the linear cavity could be easily tuned. Therefore, both the number of laser emissions and their central wavelengths can be selected.

By varying the optical attenuation of the VOA shown in the schematic set up of Fig. 3, the laser can be switched among different lasing wavelengths, lasing up to eight wavelengths simultaneously. As it well known, by reducing the number of lasing wavelengths the gain competition among the different wavelengths is also reduced, increasing the output power and stability values of the remaining ones. Likewise, multiwavelength emission is needed in some applications.

Figure 8(a) illustrates the output spectrum of a dual-wavelength laser operation with an output power level of

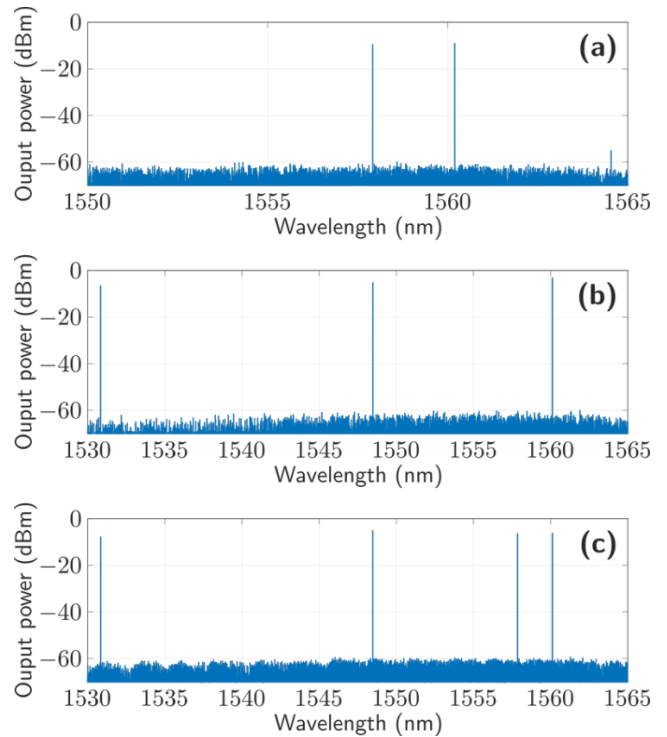


FIGURE 8. Output spectrum of the linear cavity fiber laser with a (a) dual-wavelength, (b) three-wavelength or (c) four-wavelength laser operation by using a high-resolution optical spectrum analyzer (BOSA).

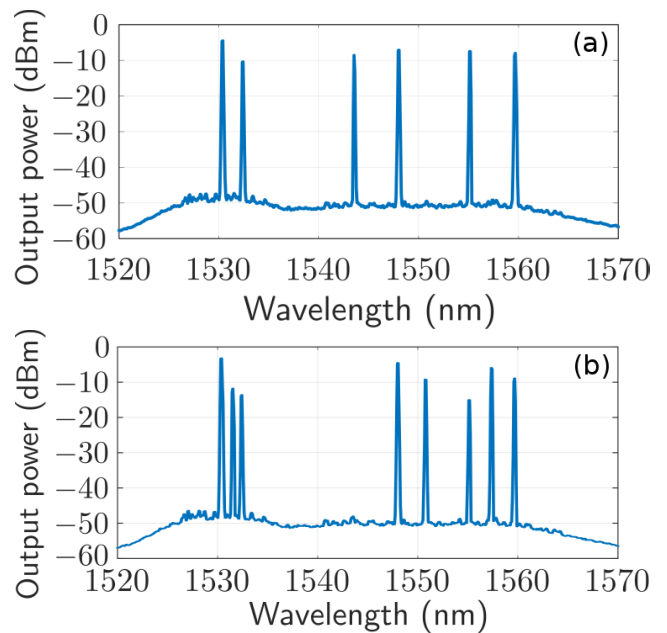


FIGURE 9. Output spectrum of the simultaneous (a) six-wavelength or (b) eight-wavelength laser oscillations in the linear short-cavity fiber laser.

around -10 dBm and an OSNR of 40 dB. Here it is presented only one of the possible dual-wavelength laser configurations that could be tuned, showing all of them similar characteristics but different central emission wavelengths. Figure 8(b) corresponds to a three-wavelength laser operation, where an

output power level obtained from each one of the output channels was around -8.5 dBm and OSNRs about 50 dB were measured. Finally, Fig. 8(c) represents the output spectrum of a four-wavelength lasing configuration with an average output power level of around -5 dBm and an OSNR of about 55 dB.

By combining the reflection provided by the VOA and the variation of the PC, more than four wavelength emission lines can be attained. However, the equalization of all these emission wavelengths was not always possible due to the lack of elements capable of equalizing these powers individually. Figure 9(a) illustrates the output spectrum of this distributed cavity fiber laser when six-wavelength lasing oscillations were obtained. In these cases, the average output power level was around -8 dBm and an OSNR of at least 40 dB was measured for each channel. In Fig. 9(b) the optical spectrum of eight-wavelength lasing oscillations can be seen. As it has been previously pointed out, the higher the number of simultaneous emission wavelengths, the harder their equalization. In this case, OSNR values from 35 to 45 dB were measured.

III. CONCLUSION

In this work, it is proposed and experimentally demonstrated a new distributed short linear cavity fiber laser. At one of the cavity ends, an artificially controlled backscattering erbium doped fiber section has been connected. This distributed reflector acts also as a saturable absorber, leading to the generation of tunable and switchable single longitudinal-mode laser emissions. The 2-meter-long distributed reflector consists of 9 micro-drilled sections of ~ 1 cm each one. These nine sections are randomly spaced into one of the highly doped erbium fibers employed into the linear cavity fiber laser. The total length of the fiber laser is 9.5 m and shows a single mode behavior at all the emitted wavelengths. The new laser structure can emit up to 8 wavelengths with an OSNR of 45 dB.

REFERENCES

- [1] H.-Y. Cheng, Y. Hsu, T.-J. Huang, Z.-Q. Yang, C.-H. Yeh, and C.-W. Chow, "Stable and tunable single-mode erbium fiber laser by utilizing silicon-based micro ring resonator and multi-ring scheme," in *Proc. Adv. Solid State Lasers (ASSL, LAC)*, Nagoya, Japan, 2017, Paper JTh2A.19. [Online]. Available: <https://www.osapublishing.org/abstract.cfm?uri=ASSL-2017-JTh2A.19>, doi: [10.1364/ASSL.2017.JTh2A.19](https://doi.org/10.1364/ASSL.2017.JTh2A.19).
- [2] C.-H. Yeh, W.-Y. You, J.-R. Chen, C.-W. Chow, and W.-P. Lin, "Utilizing self-injection Rayleigh backscattering feedback for channel-selected erbium laser with single-longitudinal-mode output," *Phys. Scripta*, vol. 95, no. 7, Jul. 2020, Art. no. 075502, doi: [10.1088/1402-4896/ab9680](https://doi.org/10.1088/1402-4896/ab9680).
- [3] C. H. Yeh and C. W. Chow, "Broadband wavelength-tunable single-longitudinalmode erbium-doped fiber ring laser using saturable-absorber filter," *Laser Phys. Lett.*, vol. 7, no. 2, pp. 158–163, Feb. 2010, doi: [10.1002/lapl.200910116](https://doi.org/10.1002/lapl.200910116).
- [4] S. K. Turitsyn, S. A. Babin, A. E. El-Taher, P. Harper, D. V. Churkin, S. I. Kablukov, J. D. Ania-Castañón, V. Karalekas, and E. V. Podivilov, "Random distributed feedback fibre laser," *Nature Photon.*, vol. 4, no. 4, pp. 231–235, Apr. 2010, doi: [10.1038/nphoton.2010.4](https://doi.org/10.1038/nphoton.2010.4).
- [5] H. Chen, S. Gao, M. Zhang, J. Zhang, L. Qiao, T. Wang, F. Gao, X. Hu, S. Li, and Y. Zhu, "Advances in random fiber lasers and their sensing application," *Sensors*, vol. 20, no. 21, p. 6122, Oct. 2020, doi: [10.3390/s20216122](https://doi.org/10.3390/s20216122).

- [6] X. Wang, D. Chen, H. Li, L. She, and Q. Wu, "Random fiber laser based on artificially controlled backscattering fibers," *Appl. Opt.*, vol. 57, no. 2, pp. 258–262, 2018, doi: [10.1364/AO.57.000258](https://doi.org/10.1364/AO.57.000258).
- [7] H. Wu, Z. Wang, W. Sun, Q. He, Z. Wei, and Y.-J. Rao, "1.5 μm low threshold, high efficiency random fiber laser with hybrid Erbium–Raman gain," *J. Lightw. Technol.*, vol. 36, no. 4, pp. 844–849, Feb. 15, 2018, doi: [10.1109/JLT.2017.2712739](https://doi.org/10.1109/JLT.2017.2712739).
- [8] R. A. Perez-Herrera, D. Pallarés-Aldeiturriaga, A. Júdez, L. R. Cobo, M. Lopez-Amo, and J. M. Lopez-Higuera, "Optical fiber lasers assisted by microdrilled optical fiber tapers," *Opt. Lett.*, vol. 44, no. 11, pp. 2669–2672, 2019, doi: [10.1364/OL.44.002669](https://doi.org/10.1364/OL.44.002669).
- [9] R. R. Gattass and E. Mazur, "Femtosecond laser micromachining in transparent materials," *Nature Photon.*, vol. 2, no. 4, pp. 219–225, Apr. 2008, doi: [10.1038/nphoton.2008.47](https://doi.org/10.1038/nphoton.2008.47).
- [10] P. Roldán-Varona, D. Pallarés-Aldeiturriaga, L. Rodríguez-Cobo, and J. M. Lopez-Higuera, "Slit beam shaping technique for femtosecond laser inscription of enhanced plane-by-plane FBGs," *J. Lightw. Technol.*, vol. 38, no. 16, pp. 4526–4532, Aug. 15, 2020, doi: [10.1109/JLT.2020.2992568](https://doi.org/10.1109/JLT.2020.2992568).
- [11] R. A. Perez-Herrera, A. Stancalie, P. Cabezudo, D. Sporea, D. Neğuț, and M. Lopez-Amo, "Gamma radiation-induced effects over an optical fiber laser: Towards new sensing applications," *Sensors*, vol. 20, no. 11, p. 2017, 2020, doi: [10.3390/s20113017](https://doi.org/10.3390/s20113017).
- [12] R. A. Perez-Herrera, M. A. Quintela, M. Fernández-Vallejo, A. Quintela, M. Lopez-Amo, and J. M. Lopez-Higuera, "Stability comparison of two ring resonator structures for multiwavelength fiber lasers using highly doped Er-fibers," *J. Lightw. Technol.*, vol. 27, no. 14, pp. 2563–2569, Jul. 15, 2009, doi: [10.1109/JLT.2008.2011820](https://doi.org/10.1109/JLT.2008.2011820).
- [13] S. Pevec and D. Donlagić, "Multiparameter fiber-optic sensors: A review," *Opt. Eng.*, vol. 58, no. 7, Mar. 2019, Art. no. 072009, doi: [10.1117/1.OE.58.7.072009](https://doi.org/10.1117/1.OE.58.7.072009).
- [14] R. A. Perez-Herrera, A. Ullan, D. Leandro, M. Fernandez-Vallejo, M. A. Quintela, A. Loayssa, J. M. Lopez-Higuera, and M. Lopez-Amo, "L-band multiwavelength single-longitudinal mode fiber laser for sensing applications," *J. Lightw. Technol.*, vol. 30, no. 8, pp. 1173–1177, Apr. 15, 2012, doi: [10.1109/JLT.2011.2174138](https://doi.org/10.1109/JLT.2011.2174138).



ROSA ANA PEREZ-HERRERA was born in Cantabria, Spain, in February 1979. She received the Telecommunications Engineering degree from the University of Cantabria, Spain, in 2004, and the Ph.D. degree from the Public University of Navarra, Pamplona, Spain, in 2010. In 2005, she joined the Optical Communications Group, Department of Electrical and Electronic Engineering, Public University of Navarra. During this period, she was a Visiting Ph.D. Student with the INESC, Unidade de Optoelectronica e Sistemas Electrónicos, Porto, Portugal; the School of Engineering and Mathematical Sciences, City University of London; and the Department of Information Engineering, University of Parma, Italy, among others. In 2009, she became an Assistant Professor with the Department of Electrical and Electronic Engineering, Public University of Navarra. Her research interests include Raman amplifiers, erbium-doped amplifiers, fiber-optic sensors, and multiplexing architectures.



PABLO ROLDÁN-VARONA was born in Cantabria, Spain, in August 1995. He received the bachelor's and master's degrees in telecommunications engineering from the University of Cantabria, Spain, in 2017 and 2019, respectively, where he is currently pursuing the Ph.D. degree with the Photonics Engineering Group. His research interests include ultrafast laser processing and optical fiber sensors.



LUIS RODRIGUEZ COBO received the Ph.D. degree in information and communication technologies (TICRM) from the University of Cantabria, Spain, in 2013. After working as a Postdoctoral Researcher with the Photonics Engineering Group (GIF), carrying out research and development and project managing task, he joined the CIBER-BBN Program of Institute of Health Carlos III as a Postdoctoral Researcher, in 2017, to enhance its research in medical applications. His research interest includes optical sensors, with particular attention to those based on optical fibers to be employed in many different scenarios. He has been awarded with the Extraordinary Ph.D. Award for his works on optical sensors.



JOSE MIGUEL LÓPEZ-HIGUERA (Senior Member, IEEE) was born in Ramales de la Victoria, Cantabria, Spain, in February 1954. He received the Telecommunication Technical Engineering degree from the Universidad Laboral de Alcalá de Henares, Madrid, Spain, and the Telecommunication Engineering degree and the Ph.D. degree in telecommunication engineering from the Universidad Politécnica de Madrid (UPM), Madrid. He founded and is currently the Head of the Photonics Engineering Group, TEISA Department, University of Cantabria. He works in the development of photonics instrumentation, photonic/optical fiber sensor systems for civil engineering, electrical power, environmental and smart structures, and for optical diagnostics for a wide range of applications. He has directed more than 50 research and development projects and has authored or coauthored more than 400 publications in the form of books, chapters of books, papers and conferences, both national and international, and holds ten patents. He is a member of the IEE, SPIE, and OSA. He received the Extraordinary Ph.D. Award. He is an editor and the coauthor of several books, including *Optical Sensors* (UC, 1998) and the *Handbook of Optical Fibre Sensing Technology* (Wiley, 2002). He is a Co-Editor of the book *Engineering a High-Tech Business: Entrepreneurial Experiences and Insights* (SPIE-Press, 2008).



MANUEL LOPEZ-AMO (Senior Member, IEEE) has been a Full Professor in photonics with the Universidad Pública de Navarra, since 1996, where he is currently the Head of the Optical Communications Group. He has been the Director of the Engineering Faculty and the Department of Electrical and Electronic Engineering, Universidad Pública de Navarra. He has led 33 research projects, including international, national, and with companies, being a co-investigator in another 26 research projects. He is the author of more than 170 JCR peer-reviewed technical articles, eight book chapters, and more than 140 communications at international conferences. He holds four patents. His research interests include optical fiber sensors, optical networks, optical fiber lasers, and integrated optics. He is a member of the OSA. He has served in 32 international and 15 national technical committees of well-reputed conferences, being now a member of the Technical Committee of the International Conference on Fiber Optic Sensors (OFS) and the European Workshop on Optical Fiber Sensors (EWOFS), among others. He has been the Chairman of the Optoelectronic Committee of Spain.

...